

## NB1-63G Miniature Circuit Breaker





## NB1-63G Miniature Circuit Breaker

### 1. General

#### 1.1 Function

protection of circuits against short-circuit currents,  
protection of circuits against overload currents,  
switch, isolation.

NB1-63G circuit-breakers are used in domestic installation,  
as well as in commercial and industry electrical  
distribution systems.

#### 1.2 Selection

Technical data of the network at the point considered:  
short-circuit current at the circuit-breaker installation point,  
which must always be less than the breaking capacity of  
this device, network normal voltage.

Tripping curves:

#### B curve (3-5In)

protection for people and big length cables in TN and IT  
systems.


#### C curve (5-10In)

protection for resistive and inductive loads with low inrush  
current.



## 2. Technical data

### 2.1 Curves

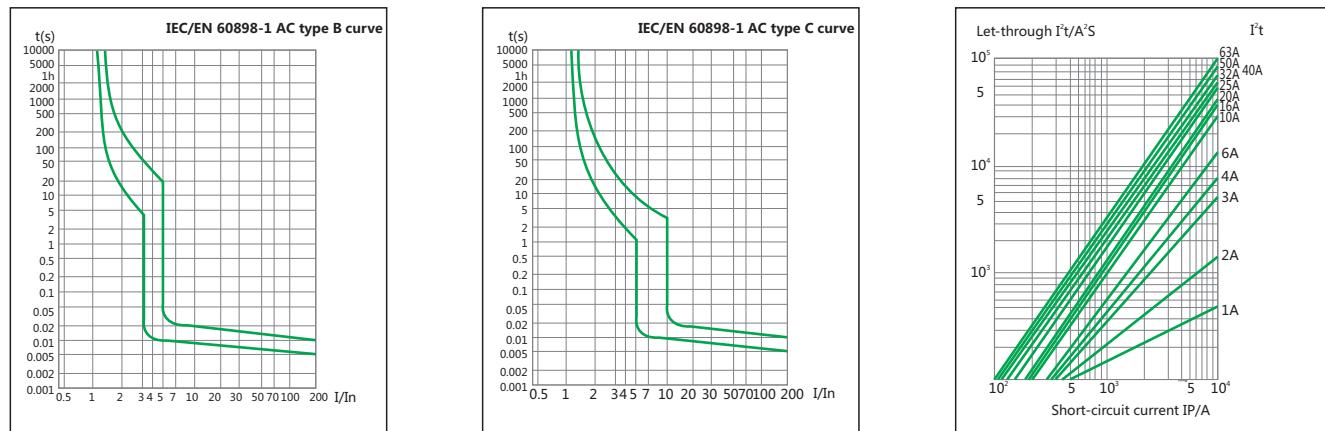

### 2.2

	Standard	IEC/EN 60898-1	
Electrical features	Rated current In	A	1, 2, 3, 4, 6, 10, 13, 16, 20, 25, 32, 40, 50, 63
	Poles		1P, 2P, 3P, 4P
	Rated voltage Ue	V	230/400
	Insulation voltage Ui	V	500
	Rated frequency		50/60Hz
	Rated breaking capacity	A	6000
	Energy limiting class		3
	Rated impulse withstand voltage(1.2/50) Uimp	V	4000
	Dielectric test voltage at Ind. Freq. for 1 min	kV	2
	Pollution degree		2
Power loss per pole	Rated current (A)	Max power loss per pole (W)	
		1, 2, 3, 4, 6, 10	2
		16, 20, 25, 32	3.5
		40, 50, 63	5
Thermo-magnetic release characteristic		B, C	
Mechanical features	Electrical life		4, 000
	Mechanical life		20, 000
	Contact position indicator		Yes
	Protection degree		IP20
	Reference temperature for setting of thermal element	°C	30
	Ambient temperature (with daily average≤35°C)	°C	-25...+60
	Storage temperature	°C	-25...+70
Installation	Terminal connection type	Cable/U-type busbar/Pin-type busbar	
	Terminal size top/bottom for cable	mm <sup>2</sup>	25
		AWG	18-4
	Terminal size top/bottom for busbar	mm <sup>2</sup>	10
		AWG	18-8
	Tightening torque	N·m	2.0
		In-lbs.	22
Combination with accessories	Mounting	On DIN rail EN 60715 (35mm) by means of fast clip device	
	Connection	From top and bottom	
	Auxiliary contact	Yes	
	Shunt release	Yes	
Under voltage release		Yes	
	Alarm contact	Yes	

## 2.3 Selectivity

In (A)	Power supply side: RT36-00 (fuse)									
	20	25	36	50	63	80	100	125	160	
	Is (kA)									
Load side: NB1-63G	≤2	1.2	4	>12	>12	>12	>12	>12	>12	>12
	3	0.7	1.2	3.8	5.3	6	6	6	6	6
	4	0.6	0.9	2.5	3.8	6	6	6	6	6
	6	0.5	0.8	1.9	2.5	4.5	5	6	6	6
	10		0.7	1.4	2.2	3.2	3.6	6	6	6
	16			1.2	1.8	2.6	3	5.6	6	6
	20				1.5	2.2	2.5	4.6	6	6
	25				1.3	2	2.2	4.1	5.5	6
	32					1.7	1.9	3.8	4.5	6
	40						1.7	3	4	5
	50						1.5	2.6	3.5	4.5
	63							2.4	3.3	4.5

In (A)	Power supply side: NM8-100S/H/R									
	16	20	25	32	40	50	63	80	100	
	Is (kA)									
Load side: NB1-63G	≤10	0.19	0.19	0.3	0.4	0.5	0.5	0.5	0.63	0.8
	16			0.3	0.4	0.5	0.5	0.5	0.63	0.8
	20					0.5	0.5	0.5	0.63	0.8
	25						0.5	0.5	0.63	0.8
	32							0.5	0.63	0.8
	40								0.63	0.8
	50									0.8
	63									

## 2.4 Backup protection

In (A)	Power supply side: RT16 series							
	40	50	63	80	100	125	160	
	Is (kA)							
Load side: NB1-63G	1~6	40	40	40	40	40	40	40
	8~10	40	40	40	40	40	40	40
	13	40	40	40	40	35	35	35
	16	40	40	40	40	30	30	30
	20	40	40	40	40	30	30	30
	25	40	40	40	40	30	30	30
	32	40	40	40	40	30	30	30
	40	40	40	40	40	30	30	30
	50	30	30	30	30	30	30	30
	63	20	20	20	20	15	15	15

In (A)	Power supply side: NM8					
	NM8-125S	NM8-125H	NM8-125R	NM8-250S	NM8-250H	NM8-250R
	Is (kA)					
Load side: NB1-63G	1~6	15	18	18	15	15
	10~20	12	15	15	12	12
	32~40	12	15	15	12	12
	50~60	12	15	15	12	12

## 2.5 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

**The reference temperature is 30°C**

Ambient temperature ↓	-25	-15	-5	0	10	20	30	40	50	60
Rated current(A)										
1	1.26	1.23	1.19	1.15	1.11	1.05	1	0.96	0.93	0.88
2	2.52	2.46	2.38	2.28	2.2	2.08	2	1.92	1.86	1.76
3	3.78	3.69	3.57	3.42	3.3	3.12	3	2.88	2.79	2.64
4	5.04	4.92	4.76	4.56	4.4	4.16	4	3.84	3.76	3.52
6	7.56	7.38	7.14	6.84	6.6	6.24	6	5.76	5.64	5.28
10	12.7	12.5	12	11.5	11.1	10.6	10	9.6	9.3	8.9
16	20.48	20	19.2	18.4	17.76	16.96	16	15.36	14.88	14.24
20	25.6	25	24	23	22.2	21.2	20	19.2	18.6	17.8
25	32	31.25	30	28.75	27.75	26.5	25	24	23.25	22.25
32	41.28	40	38.72	37.12	35.52	33.92	32	30.72	29.76	28.16
40	51.2	50	48	46.4	44.8	42.4	40	38.4	37.2	35.6
50	65.5	63	60.5	58	56	53	50	48	46.5	44
63	81.9	80.01	76.86	73.71	70.56	66.78	63	60.48	58.9	55.44

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure, the temperature rise inside the enclosure causes a reduction in current rating.

You must then assign the rating (already derated if necessary according to ambient temperature) a downrating factor of 0.8.

## 3. Overall and mounting dimensions (mm)

