

Pull Cord Switch

LHP_xW-xx/x-B

LHM_xW-xx/x-B



DITTELBACH UND KERZLER

Interchangeable
to the AEG-pullcord switch
„NSR“



- **Impact resistant BMC enclosure**
optional cast iron
- **IP67**
- **Up to 2 x 50 metre pull cord**
- **Up to 8 contacts**
- **Snap action**
- **Direct opening, positive drive**



The design of these pull cord switches considers heavy duty service. Enclosures made of most stable, impact resistant, thick walled glass fibre-reinforced polyester (BMC) or optional of cast iron are the best guarantors for long year reliable service. Both types are at least IP67-protected (water- and dust proof).

Pull cord switches of this type are for double-sided rope mounting with a maximum rope length of 2 x 50metres. Pulling on one of these ropes operates all contacts via snap action mechanism independent on the direction of pulling. Simultaneously with this operation the latching is being effected automatically. The status (operated/not operated) as well as the direction from where the switch has been operated is indicated by the position of the latched actuation lever. The direct opening system (positive drive) forces the snap action NC-contacts into open position under all circumstances.

These switches will be equipped with up to 4 micro switches. Each micro switch incorporates either 1NC plus 1NO contact or alternatively 2NC's. They commutate independent on the direction of pull cord actuation. The contacts are made of silver, a gold coating is optional. The contact surfaces are wiping: with every actuation, they are cleaning themselves. Each micro switch is certified by VDE and CCC and is bearing their signs:



The switches are approved also to bear the Eurasian EAC sign.

Unrivalled long pull cord travel and the high actuation force prevent unwanted stops caused by solids falling onto the pull cord.

Guarantors for an extended, reliable life time are most important details like sealing rings protecting the shafts, an extra hard rubber gasket in the lid, shafts and screws made of stainless steel,

Options

- Dupline Safety Bus or Fieldbus by Carlo Gavazzi
- Signalling light
- Explosion protection (ATEX) separate leaflet



DITTELBACH UND KERZLER

GmbH & Co. KG

Talstrasse 27

D-35394 Giessen

Tel.: +49 641 97224-0

Fax: +49 641 97224-22

Web: www.DUK.eu

E-mail: info@DUK.eu

Pull Cord Switch

LHP_{xW-xx/x-B}

LHM_{xW-xx/x-B}



Selection table

Switch type	Contacts		Contact surface
	NC	NO	
FRP (BMC) enclosure			
LHPEw-10/1-B	1	1	Silver
LHPEw-18/1-B	2	-	Silver
LHPEw-10/2-B	2	2	Silver
LHPEw-18/2-B	4	-	Silver
LHPEw-18/1 + 10/1-B	3	1	Silver
LHPw-10/3-B	3	3	Silver
LHPw-10/4-B	4	4	Silver


Cast iron enclosure

LHMEw-10/1-B	1	1	Silver
LHMEw-18/1-B	2	-	Silver
LHMEw-10/2-B	2	2	Silver
LHMEw-18/2-B	4	-	Silver
LHMEw-18/1 + 10/1-B	3	1	Silver
LHMw-10/3-B	3	3	Silver
LHMw-10/4-B	4	4	Silver

All types also available with Gold contacts:

Instead off the figure „10“ the figure „13“ and
Instead off the figure „18“ the figure „19“.
e.g. LHPE-13/1-B (1NC + 1NO gold contacts)

The demands of the European standards EN 60947-5 and DIN EN 418 for automatic emergency stop command due to rope fracture are fulfilled when used in combination with preload springs SPF-W

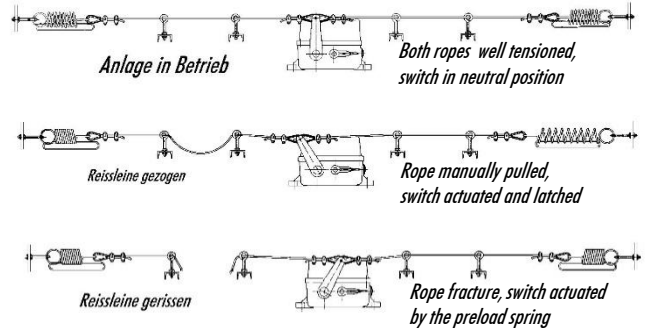

Technical Data

According to standards EN 60 947-5-5 / EN60204 / EN13850 if equipped and proper installed with 2 pretensioning springs type SPF-W

Approval of micro switches



Reg.Nr.: 6671, 6827, 40026213



Approval



I_{th} (thermal current)

10A

Rating

Silver: 400VAC 6A / 230VAC 8A / 24VDC 10A / 80VDC 3 A

Minimum Current

Gold: 1mA bei 6VDC

Utilization Category

Silver: AC-15 230V 1A DC-13 110V 0,5A
Gold: AC-12 230V 250mA DC-12 110V 250mA

U_i Rated Insulation Voltage

400V

U_{imp} Rated Impulse

4kV

Terminals

Screw, each terminal clamp 1 or 2 cables, each max 2,5mm²

Protection

IP67 acc. EN 60529, at least IK08 acc. EN 66262

Cable Entries

2 x M25-threaded, EXW closed by IP67-protecting plugs

Housing Material

Fibreglass Reinforced Polyester BMC (types LHP....)
Cast Iron (LHM...)

Colours

yellow RAL 1003, optional red RAL 3000

Coating

Cast iron 2 layer 2-component PU / BMC none

Weight / Mass

approx. 2.2 kg (LHP...), 6 kg (LHM...)

Mounting position



free

Ambient operation temperature

-40°C up to +85°C (-55°C on request)

Basic values for calculation of SIL or PL according EN 13849 and IEC 61508:

$$B_{10} = B_{10d} \quad 80000 \text{ cycles}$$

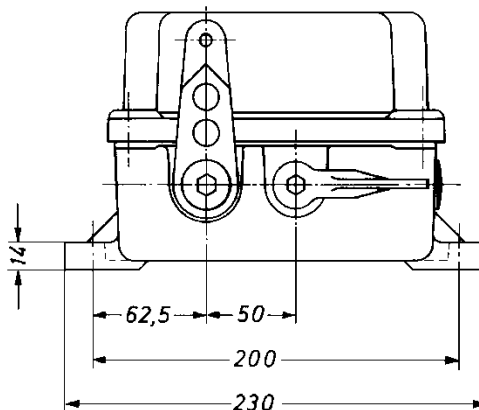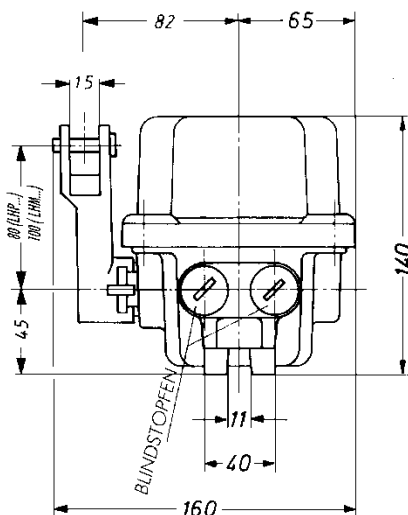

DITTELBACH UND KERZLER GmbH & Co. KG Talstrasse 27 D-35394 Giessen

Tel.: +49 641 97224-0

Web: www.DUK.eu

E-mail: info@DUK.eu